


Product: 96W LED Street Light

11500 S. Sam Houston Pkwy. W. | Houston, TX 77031 | 713.771.5312

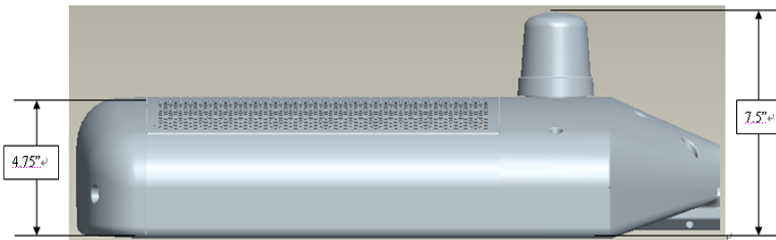

SL96-ALUM
SL96-BRZ

Fixture Specifications	
LED Power Consumption	96W
Total Lumens	8425 lm
Total Fixture Wattage	103.7W
Fixture Efficacy	81.28 lm/w
CCT	5500K
CRI	67.0
Rated Life	106,000 Hours
Operating Voltage	100 – 277 V
Input Current (A)	.8670
Power Factor	0.9961
Drive Current to LED's	650mA
Off State Power	0.0 Watts
Hertz Range	4 - 63HZ
Operating Temperature	-40F - 140F -40C - 60C
Operating Humidity	10% - 100% RH
Protection Grade	IP68 – Wet Rated
Distribution Type	Type II Medium
Light Pattern	Uneven Bat Wing (rectangular facular)
Shine area (at height of 20 to 25 feet)	Length = 100 - 115 feet Width = 26 - 33 feet
Fixture Dimension	25.25"L x 15.75"W x 4.5"H
Material	Aluminum alloy and Polycarbonate
Finish Options	Available in Aluminum and Bronze
Photocell	Photocell not included - Fixture includes receptacle for Twist-Lock Photocell
Input Voltage of Photocell	105V to 285V



Notes: Photocell and Mounting Arm are available. If fixture is being used in a retrofit, please provide bolt pattern for the mounting arm. For the photocell, please specify voltage.